


Managed 52 Ports Switch

Indoor L2 Managed Ethernet Switch

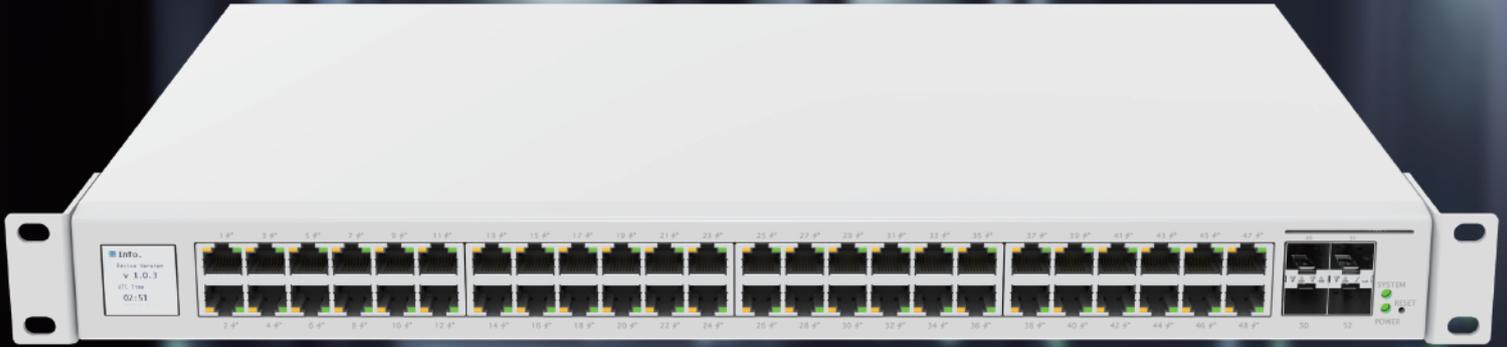

Key Features

- ▶ An Indoor L2 Managed Ethernet Switch
- ▶ Support 48 x 10/100/1000Base-T ports + 4x 1/10G SFP+ ports
- ▶ 48 x 1GE copper ports support IEEE 802.3at/802.3af POE PSE capability
- ▶ LCD touch panel to provide visible status information


Models	RSW252G-1PV	RSW252G-2PV	RSW252G-1V
Dimension H x W x D (mm)	44x440x300		44x440x230
Performance			
Switch capacity (Gbps)	176	176	176
Forwarding capacity (Mpps)	130.94	130.94	130.94
Ports			
1GBase-T	48	48	48
2.5GBase-T	-	-	-
1G/10G (SFP+)	4	4	4
Power over Ethernet ports	48 x 802.3at (30W)	48 x 802.3at (30W)	-
LCD			
LCD touch panel	1.3"	1.3"	1.3"
Power and Cooling			
Max. PoE power budget (Watt)	370	720	-
Power options	AC 100~240V	AC 100~240V	AC 100~240V
Internal power supply	1 PSU included	1 PSU included	1 PSU included
Airflow	Smart FAN	Smart FAN	Smart FAN
Operating Temperature	0oC~50°C / 32oF~104°F	0oC~50°C / 32oF~122°F	0oC~50°C / 32oF~104°F
Operating Humidity	10% ~ 95%, Non-condensing		

Ordering Information


Model name	Description
RSW252G-1PV	48xGE POE+ & 4x1/10G SFP+ L2 managed POE switch, POE power budget 370W, LCM display, 1U height, 19" rack mount, 100~240V AC inlet.
RSW252G-2PV	48xGE POE+ & 4x1/10G SFP+ L2 managed POE switch, POE power budget 720W, LCM display, 1U height, 19" rack mount, 100~240V AC inlet.
RSW252G-1V	48xGE & 4x1/10G SFP+ L2 managed switch, LCM display, 1U height, 19" rack mount, 100~240V AC inlet.

Installation Steps


01

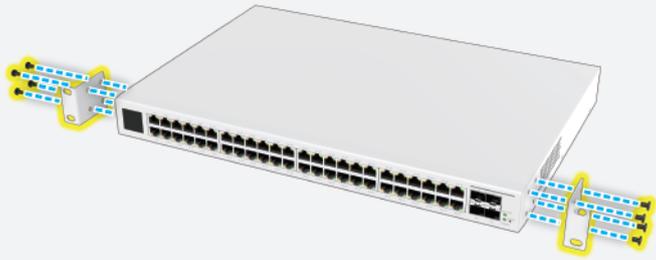


02

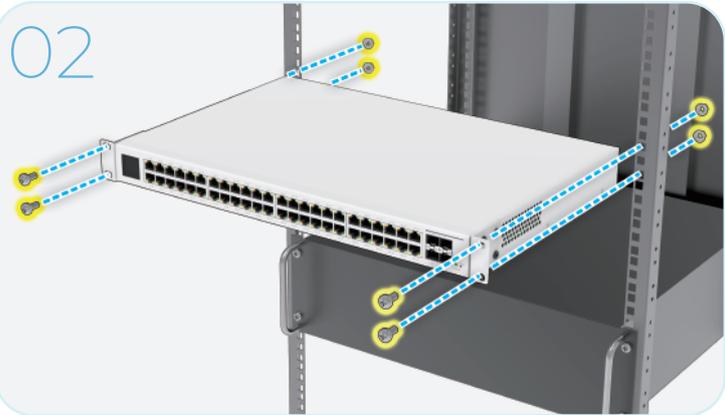


03

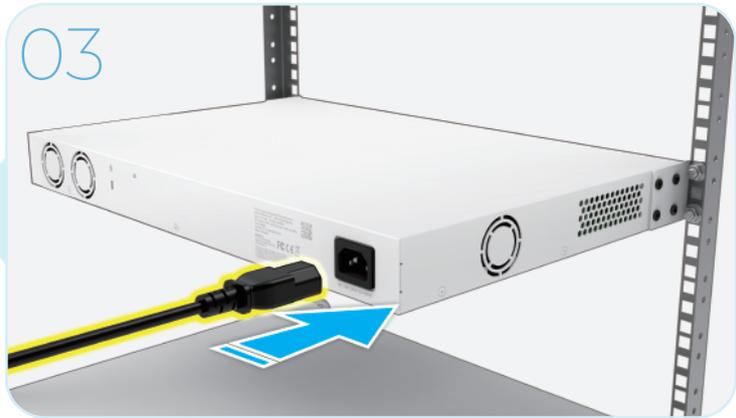

Product Outlook and Dimension

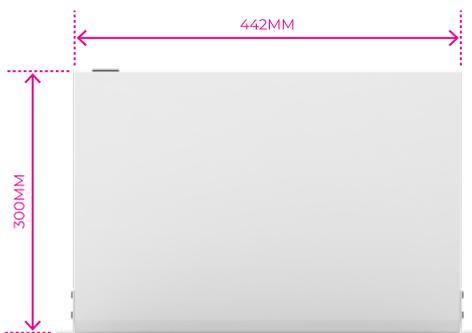

RSW252G-2PV & RSW252G-1PV

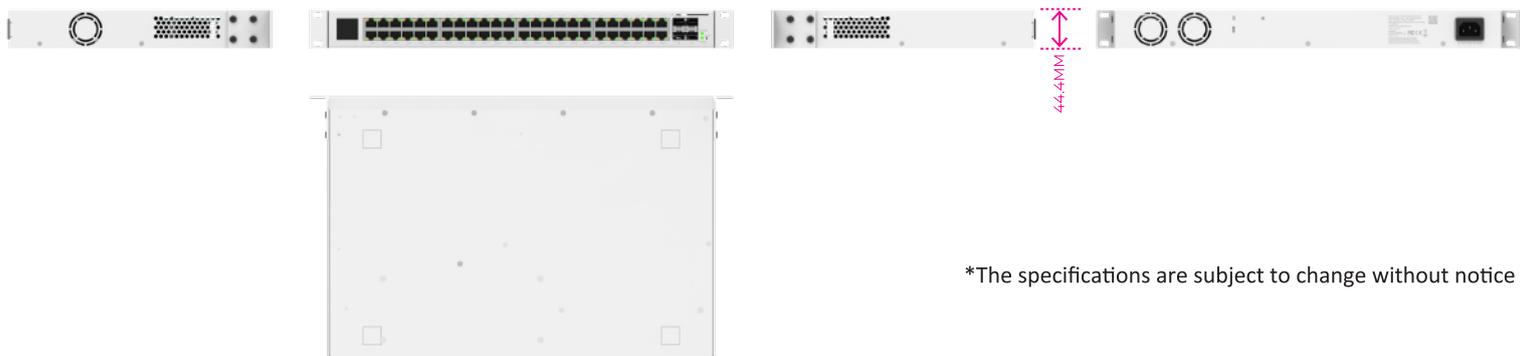

*The specifications are subject to change without notice